


Accessory - Unigrout A

Unigrout A: Unigrout A(original formula) is a very high strength epoxy grout. Unigrout is an accessory product for use with expansion joint systems but can be used as a general purpose epoxy grout for filling or patch work. It's high compressive & flexural strength make it ideal for use for bedding & nosing of floor expansion joints in warehouses and bulky goods stores. For external areas use Unigrout NF.



Typical Bulky Goods/ Polished Concrete Application:

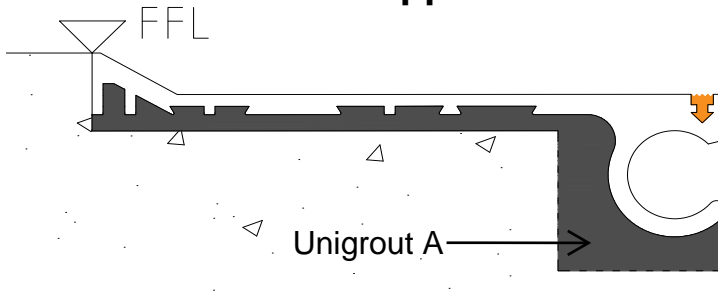

Part	12Lt Kit	24Lt Kit
Part A	2.5kg	5kg
Part B	1.5kg	3kg
Part C	16kg	32kg
Total	20kg	40kg

Tech Data

Cure Time	Initial: 8Hours Full: 7 Days
Pot Life @25°C	Approx. 30-60 Mins
Compressive Strength	100-120 N/mm
Flextural Strength	30-35 N/mm

Disclaimer: All design rights reserved. Design and specifications are subject to change without notice. The manufacturer does not accept liability where the material on these pages is misconceived, exploited, or lacks conformity. The intention of this information is to provide a reasonable description of products, procedures and capabilities. Rev.3



Unigrout A



Performance

High strength epoxy grout

For nosing and repair work of concrete

High compressive, flexural and bond strength

Industrial/ Commercial/ Civil applications

Chemical resistance & impermeability to water

Standard Package

12Lt 20kg

24Lt 40kg