
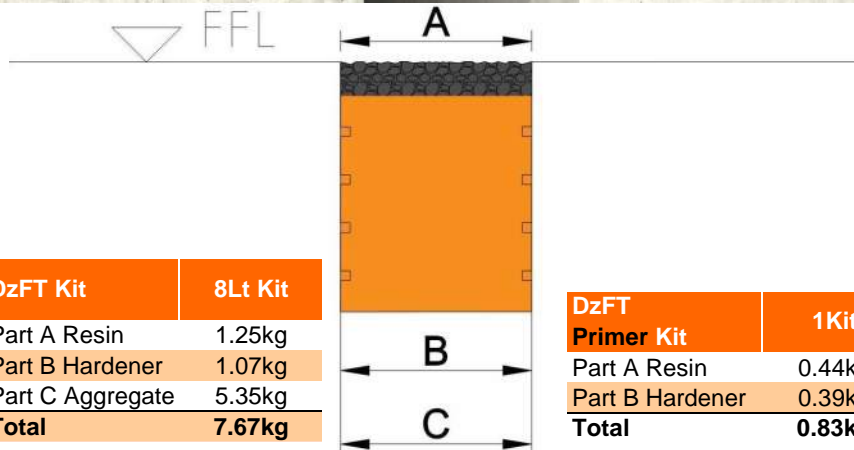


Designer's Choice FTAq type Waterproof Carparks Stadium EJ

DzFTAq: A high-movement polyethylene foam waterseal with pedestrian friendly rubber tread-piece. The specially formulated, highly flexible polyethylene foam is simple to install... including welding of junctions and upturns. This results in a 100% waterproof seal. Negates the use of surface-mount plates which present trip-hazards, work loose, and become noisy. Ideal for stadium-plats and roof-top carparks. (see also Aquo) DzFTAq is designed for use in covered carparks. For open-air carparks use By150N with AqP.

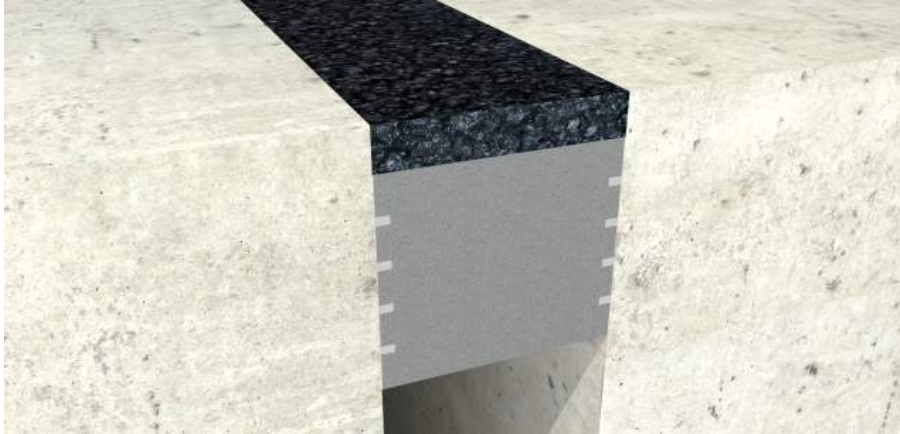

DzFT Kit	8Lt Kit
Part A Resin	1.25kg
Part B Hardener	1.07kg
Part C Aggregate	5.35kg
Total	7.67kg

DzFT Primer Kit	1Kit
Part A Resin	0.44kg
Part B Hardener	0.39kg
Total	0.83kg



Dz FTAq

Previous Model No: Uniseal PB/AR



Performance

- UV stable
- High movement waterseal
- 100% waterproof seal
- Pedestrian friendly support for High Heels Shopping Trolley

Compatible Finishes

- Epoxy
- Exposed Concrete

Standard Package

- Dz FT Primer Part A & Part B
- Dz FT Kit Part A, Part B & Part C

Options



Product	A: Seal		B: Gap			Mvmt.	C: Installation Gap	Length per 8lt DzFT Kit (8mm Depth)
	Width	Thick	Min.	Mid.	Max.			
AqP Waterseal Movement & Gap Data								
Dz30FTAq	30	40	12	25	37	25	23	31.6
Dz45FTAq	45	40	18	37	56	38	34	21.6
Dz50FTAq	50	50	20	41	62	42	37	19.5
Dz55FTAq	55	50	22	45	68	46	41	17.8
Dz60FTAq	60	50	24	50	75	51	44	16.4
Dz65FTAq	65	50	26	54	81	55	48	15.2
Dz70FTAq	70	50	28	58	87	59	51	14.2
Dz75FTAq	75	50	30	62	93	63	55	13.3
Dz80FTAq	80	50	32	66	100	68	58	12.5
Dz85FTAq	85	50	34	70	106	72	62	11.7
Dz90FTAq	90	50	36	74	112	76	65	11.1
Dz95FTAq	95	50	38	78	118	80	69	10.5
Dz100FTAq	100	50	40	83	125	85	72	10.0
Dz110FTAq	110	50	44	91	137	93	79	9.1
Dz120FTAq	120	50	48	99	150	102	86	8.4
Dz130FTAq	130	80	52	107	162	110	108	6.7
Dz140FTAq	140	80	56	116	175	119	113	6.4
Dz150FTAq	150	80	60	124	187	127	125	5.8

Disclaimer: Dz FTAq flex-tread is a semi-rigid rubber compound applied to the surface of AqP water seal. It is designed to provide flush mount support for shopping trolley, passenger vehicle and pedestrian traffic. Dz FTAq flex-tread does not have the flexibility of the AqP installed below it, and therefore may crack during movement. This does not affect performance of Dz FTAq flex-tread, or the AqP water seal below it. All design rights reserved. Design and specifications are subject to change without notice. The manufacturer does not accept liability where the material on these pages is misconceived, exploited, or lacks conformity. The intention of this information is to provide a reasonable description of products, procedures and capabilities. Rev.10