
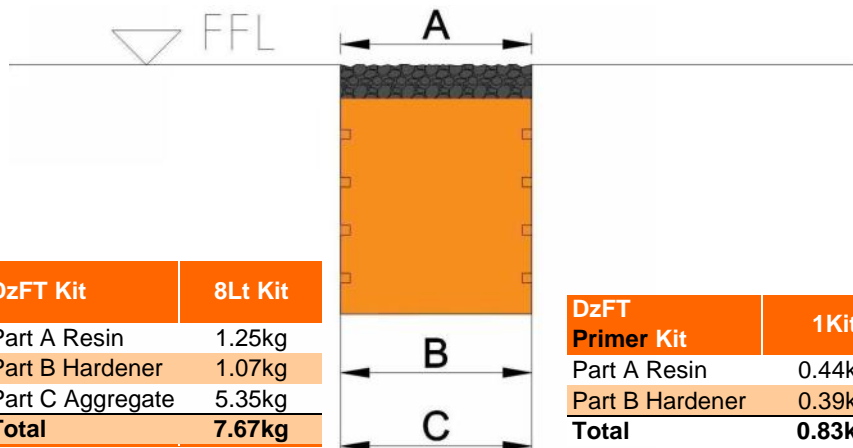


Designer's Choice FTAq type Waterproof Carparks Stadium EJ

Designer FTAq: A high-movement polyethylene foam waterseal with pedestrian friendly rubber tread-piece. The specially formulated, highly flexible polyethylene foam is simple to install... including welding of junctions and upturns. This results in a 100% waterproof seal. Negates the use of surface-mount plates which present trip-hazards, work loose, and become noisy. Ideal for stadium-plats and roof-top carparks. (see also Aquo P) DzFTAq is designed for use in covered carparks. For open-air carparks use By150N with AqP.

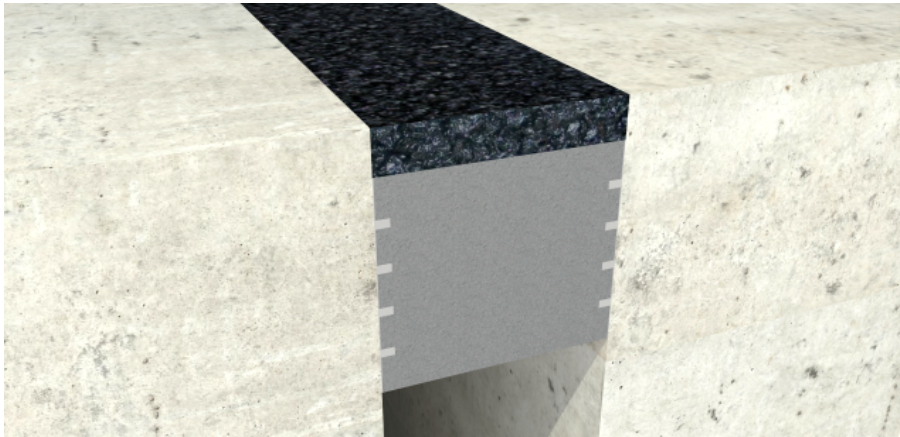

Dz FTAq

Previous Model No: Uniseal PB/AR



Performance

- UV stable
- High movement waterseal
- 100% waterproof seal
- Pedestrian friendly support for High Heels Shopping Trolley

Compatible Finishes

- Epoxy
- Exposed Concrete

Standard Package

- Dz FT Primer Part A & Part B
- Dz FT Kit Part A, Part B & Part C

Options

Fire Rating



Product	A: Seal		B: Gap				C: Installation Gap	Length per 8lt DzFT Kit (8mm Depth)
	Width	Thick	Min.	Mid.	Max.	Mvmt.		
AqP Waterseal Movement & Gap Data								
Dz30FTAq	30	40	12	25	37	25	24	30.3
Dz45FTAq	45	40	18	37	56	38	35	20.7
Dz50FTAq	50	50	20	41	62	42	39	18.6
Dz55FTAq	55	50	22	45	68	46	43	17
Dz60FTAq	60	50	24	50	75	51	47	15.4
Dz65FTAq	65	50	26	54	81	55	50	14.5
Dz70FTAq	70	50	28	58	87	59	54	13.4
Dz75FTAq	75	50	30	62	93	63	58	12.5
Dz80FTAq	80	50	32	66	100	68	62	11.7
Dz85FTAq	85	50	34	70	106	72	66	11.0
Dz90FTAq	90	50	36	74	112	76	70	10.3
Dz95FTAq	95	50	38	78	118	80	74	9.8
Dz100FTAq	100	50	40	83	125	85	77	9.4

Disclaimer: Dz FTAq flex-tread is a semi-rigid rubber compound applied to the surface of AqP water seal. It is designed to provide flush mount support for shopping trolley, passenger vehicle and pedestrian traffic. Dz FTAq flex-tread does not have the flexibility of the AqP installed below it, and therefore may crack during movement. This does not affect performance of Dz FTAq flex-tread, or the AqP water seal below it. All design rights reserved. Design and specifications are subject to change without notice. The manufacturer does not accept liability where the material on these pages is misconceived, exploited, or lacks conformity. The intention of this information is to provide a reasonable description of products, procedures and capabilities. Rev.12