
SeiMax DX Coverplate EJs

SeiMax DX: An architectural floor expansion joint system with a combination of recessed coverplate and thermoplastic seals. This seismic system is designed to house a range of floor-finishes. The seals and floor-finish provide a flush transition. Seals are purpose-designed with smooth ripples to accommodate more movement than other inferior designs. They are made from dual-durometer santoprene for use in areas where hygiene is imperative. SiDX floor joint systems are prominently used in hospitals....but this type of system can be used for many applications such as apartments, public buildings (museums), retail centres, airport terminals and other commercial buildings.





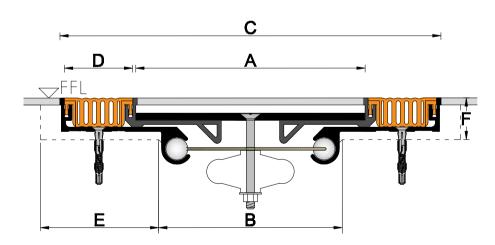

Performance

No bump transition Weather / Anti-pathogenic seal Concealed fixings Thermal & seismic movement

Compatible Finishes

Tiles Vinyl Epoxy Exposed Concrete

Standard Length

4.8m

Standard Finish Anodised Aluminium

Options

Clear Anodised





	A: Coverplate	B: Gap				C: Exposed Width			D:Seal	Installation	Seismic
Product	Width	Min.	Mid.	Max.	Mvmt.	Min.	Mid.	Max.	Width	Gap Width	Movement
Si180DX	180	92	106	120	28	279	293	307	50	100	≥225
Si230DX	230	142	156	170	28	329	343	357	50	150	≥225
Si280DX	280	192	206	220	28	379	393	407	50	200	≥225
Si130DX	130	134	158	182	48	271	295	319	75	150	≥225
Si180DX	180	184	208	232	48	321	345	369	75	200	≥225
Si230DX	230	234	258	282	48	371	395	419	75	250	≥225
			-			~ = =	~				

Block Out: 75E x 25F x 25G x 25H

Disclaimer: All design rights reserved. Design and specifications are subject to change without notice. The manufacturer does not accept liability where the material on these pages is misconceived, exploited, or lacks conformity. The intention of this information is to provide a reasonable description of products, procedures and capabilities. Rev.2