


Accessory - Unigrout NF

Unigrout NF: Unigrout NF is a specially formulated epoxy grout for nosing & bedding of expansion joint systems. Its mechanical properties make it suitable for use in outdoor environments where, using traditional epoxy grouts can cause delamination due to the difference in coefficient of expansion. Unigrout NF is used as a nosing in carpark and bridge expansion joint systems. It can be used in conjunction with Aquo P waterseal system or other carpark systems.



Typical Application:

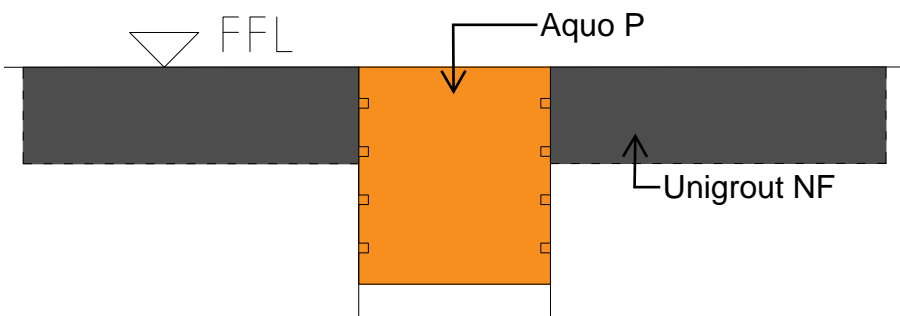

Tech Data	Mixture
-----------	---------

Cure Time	Initial: 2Hours Full: 7 Days
Pot Life @25°C	Approx. 15-25 Mins
Compressive Strength	34±3 MPa
Brittleness	13.5 Nm
Bond Strength	3.4 MPa
Shore D Hardness	65±5

Tech Data	Binder
-----------	--------

Tensile Strength	13.7±1.3 MPa
Tear Strength	2.0±0.1 MPa



Unigrout NF



Performance

Epoxy grout

For nosing and repair work of concrete

High elongation and bond strength

Industrial/ Commercial/ Civil/ External applications

Chemical resistance & impermeability to water

Standard Package

25.5kg 13.5Lt

Part	13.5Lt Kit
Part A	4.7kg
Part B	0.8kg
Part C	20kg
Total	25.5kg

Disclaimer: All design rights reserved. Design and specifications are subject to change without notice. The manufacturer does not accept liability where the material on these pages is misconceived, exploited, or lacks conformity. The intention of this information is to provide a reasonable description of products, procedures and capabilities. Rev.3