

Accessory - Unigrout NF

Unigrout NF: Unigrout NF is a specially formulated epoxy grout for nosing & bedding of expansion joint systems. Its mechanical properties make it suitable for use in outdoor environments where, using traditional epoxy grouts can cause delamination due to the difference in coefficient of expansion. Unigrout NF is used as a nosing in carpark and bridge expansion joint systems. It can be used in conjunction with Aquo P waterseal system or other carpark systems.



Unigrout NF



Performance

Epoxy grout

For nosing and repair work of concrete

High elongation and bond strength


Industrial/ Commercial/ Civil/ External applications

Chemical resistance & impermeability to water

Standard Package

25.5kg 13.5Lt

Typical Application:

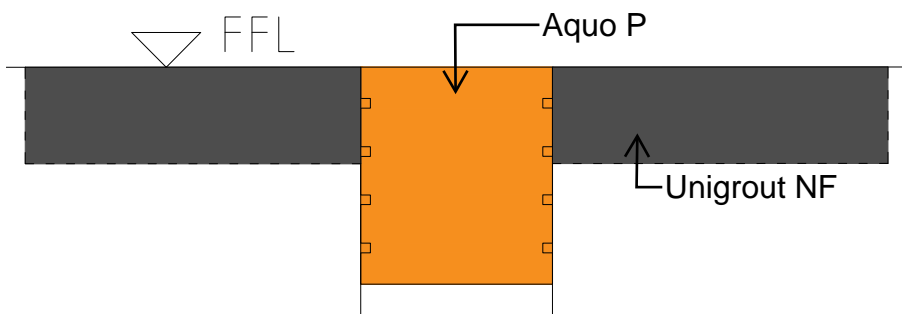

Tech Data

| | |
|----------------------|------------------------------|
| Cure Time | Initial: 2Hours Full: 7 Days |
| Pot Life @25°C | Approx. 15 - 25 Mins |
| Compressive Strength | 25 ± 0.5 MPa |
| Brittleness | 13.5 Nm |
| Bond Strength | 3.4 MPa |
| Shore D Hardness | 65±5 |

Tech Data

| | |
|------------------|---------------|
| Tensile Strength | 5.2 ± 0.2 MPa |
| Tear Strength | 2.0±0.1 MPa |

| Part | 13.5Lt Kit |
|--------------|---------------|
| Part A | 4.7kg |
| Part B | 0.8kg |
| Part C | 20kg |
| Total | 25.5kg |

Disclaimer: All design rights reserved. Design and specifications are subject to change without notice. The manufacturer does not accept liability where the material on these pages is misconceived, exploited, or lacks conformity. The intention of this information is to provide a reasonable description of products, procedures and capabilities. Rev.5