
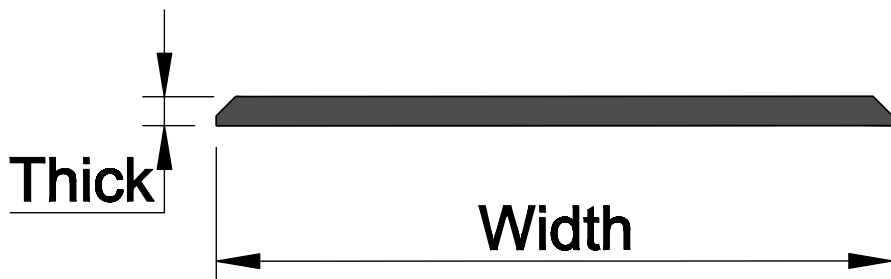


Accessory - Coverplate

Acc C: Clear anodised aluminium coverplates. AccC is suitable for general covering purpose. Pre-drilled fixing holes also available if requested. Recommend fasteners can be ordered as well.

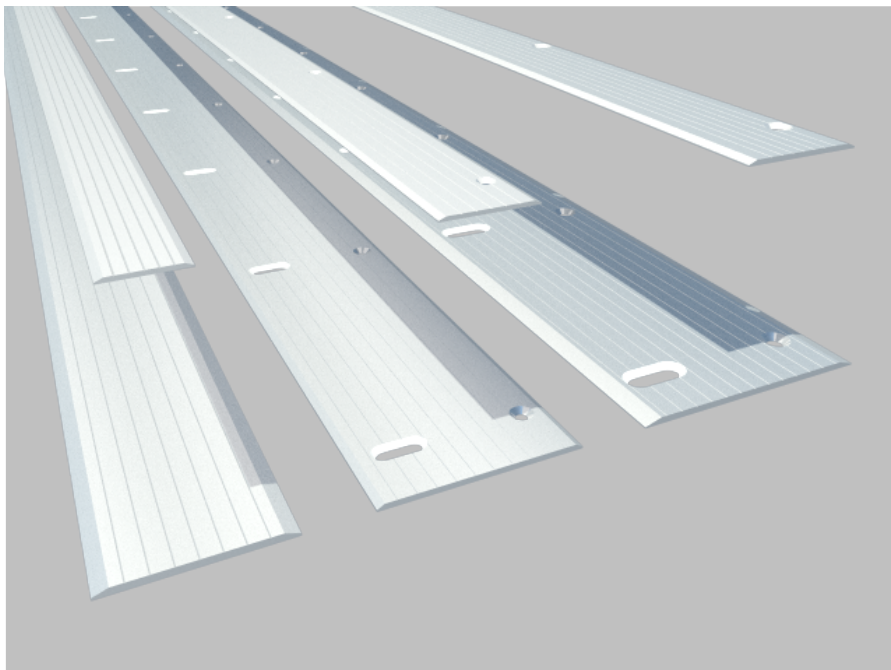

Coverplate

Previous Model No: UACC



Performance

Aluminium Coverplate
 Floor, wall and ceiling applications
 Hole size/spacing adjustable
 Low profile
 Retrofit applications
 Surface mount
 Suitable for variety of floor & wall finishes
 Standard Anodised Finish P3 Slip Rating
Bead-blasted Finish P5 Slip Rating
Tested to AS4586 2013

Standard Length

4.8m

Standard Finish

Anodised Aluminium

Options



Product	Coverplate		Suitable Fasteners	Material	Finish
	Width	Thick			
Acc50C	50	3	10 Gauge	6106 T6	Anodised
Acc70C	70	3	12 Gauge	6106 T6	Anodised
Acc100C	100	4	12 Gauge	6106 T6	Anodised
Acc165C	165	5	12 Gauge	6063 T6	Anodised
Acc180C	180	4	12 Gauge	6106 T6	Anodised
Acc220C	220	6	14 Gauge	6061 T6	Anodised
Acc300C	300	6	12 mm	6061 T6	Anodised

Disclaimer: All design rights reserved. Design and specifications are subject to change without notice. Acc C coverplates are surface-mounted and often an improved nomination to an application which might be more suited to a 3 piece flush-mount system. As such, there is no guarantee the Acc C will not dislodge. The manufacturer does not accept liability where the material on these pages is misconceived, exploited, or lacks conformity. The intention of this information is to provide a reasonable description of products, procedures and capabilities. Rev.6