



# Aquo H Hypalon Gland

**Aquo H:** Aquo H is a rubber gland system which is used for water proofing high movement expansion joint gaps. Aquo H can be used in horizontal and vertical applications. There are holes in each side to assist in anchoring to the substrate. Extra holes can and should be used when Aquo H is fixed under cover systems with applied vertical loads. Aquo H can be solvent welded for upturns, T junctions and other detailing. Building applications include: Retail Centres, Carparks, Transit Terminals, Pedestrian Bridges, Hospitals & other commercial & public buildings.

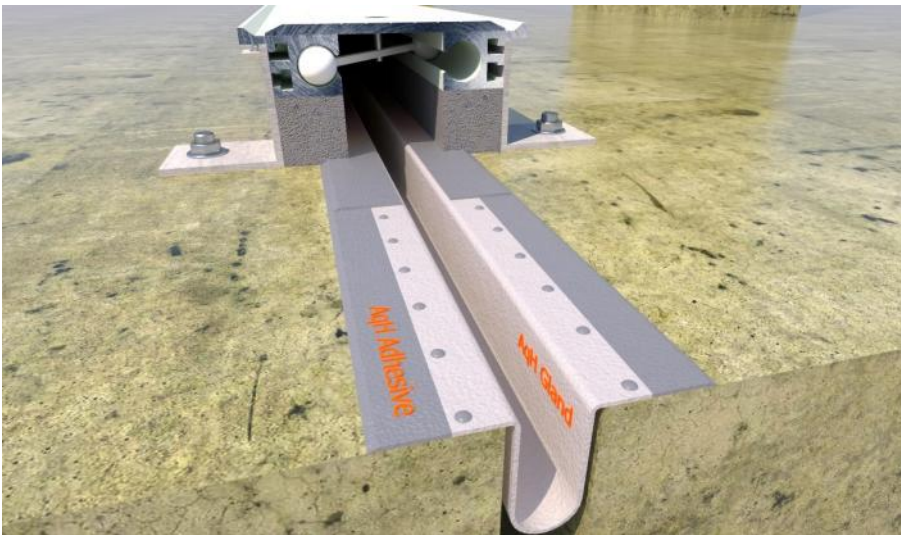

\*Expansion joint cover system for illustration purpose only

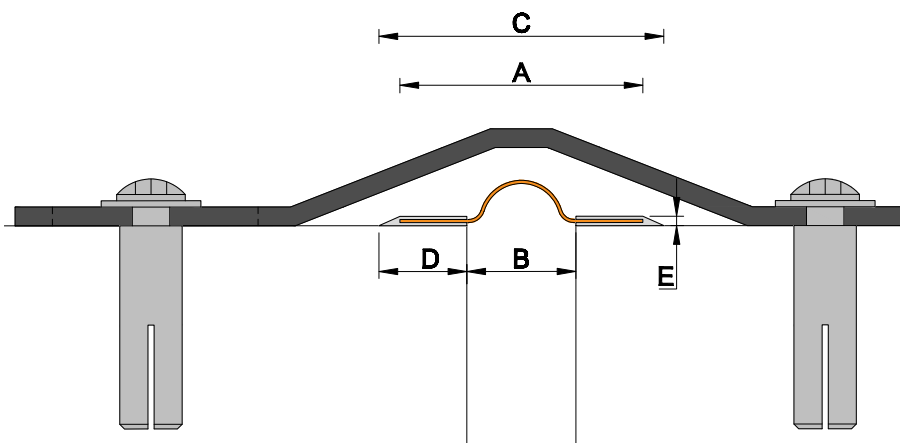

\*Plate & fasteners not included

Product	A: Seal		B: Gap				C: Exposed Width		
	Width	Thick	Min.	Mid.	Max.	Mvmt.	Min.	Mid.	Max.
Aq150H	150	1	0	45	90	90	100	145	190
Aq200H	200	1	0	70	140	140	100	170	240
Aq250H	250	1	0	95	190	190	100	195	290
AqH Adhesive	3L per Kit		Usage: 7m per 3L Kit						

**Block Out: 50D x 7E**

Disclaimer: All design rights reserved. Design and specifications are subject to change without notice. The manufacturer does not accept liability where the material on these pages is misconceived, exploited, or lacks conformity. The intention of this information is to provide a reasonable description of products, procedures and capabilities. Rev.3



## Aq H

Previous Model No: Uniseal HP



Multi-directional



## Performance

Waterproofing

High movement range

Used with speed bumps or other architectural joints

## Standard Length

25m

## Options

Fire Rating

